

# VLOMINGO


VLOMINGO is a smart ECM harness, similar to a regular bench harness but with advanced features.

Remote programming options used to be impossible through OBD port will come true. EGR delete, wide support of 2020+ trucks and machines, ePRV delete kits support and much much more!


It can be used in both ways: on the bench or on the engine (truck/machine). Works with any RP1210 adapter.

## What's in the box:



### 1. VLOMINGO basics:

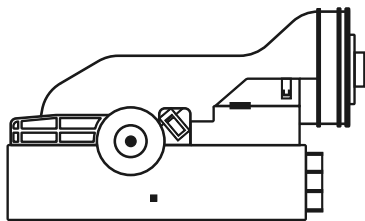


VLOMINGO (1 pc)

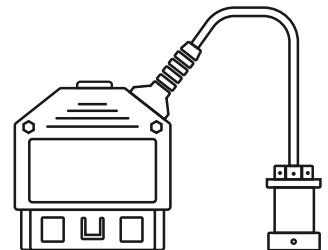


VLOMINGO UNO Cable (1 pc)

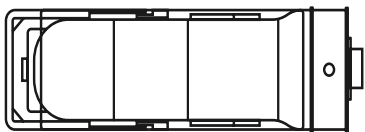


### 2. Three Types Of Power Connectors

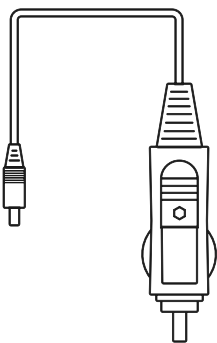

Cigarette lighter  
power cable (1 pc)

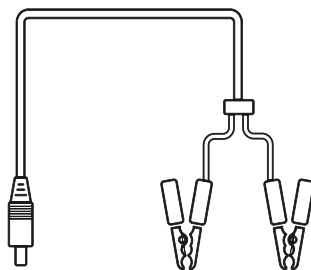

Power cable with battery  
alligator clips (1 pc)

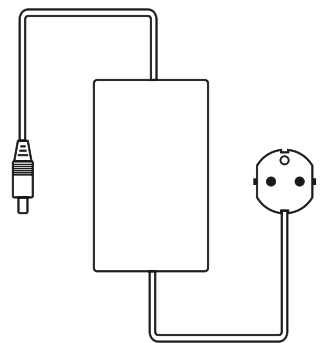


AC adapter  
(1 pc)

# Connection and Tuning:



**Important: Disconnect both connectors from the ECM before using the VLOMINGO!**

1. The VLOMINGO connection and ECM preparation.

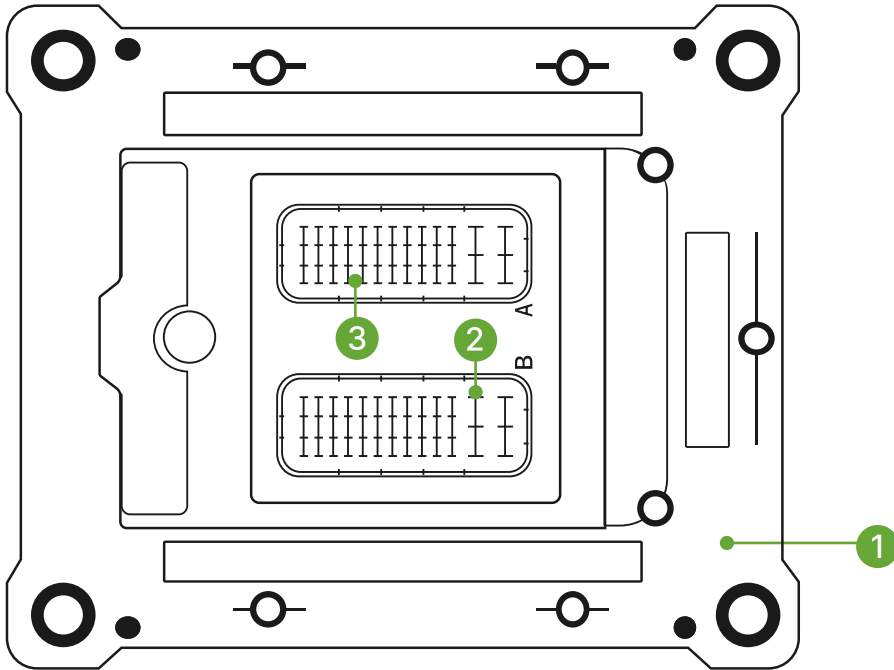

Prepare the ECM ① for connection with the VLOMINGO ④.

- Release sockets (A,B) ③ and ②.

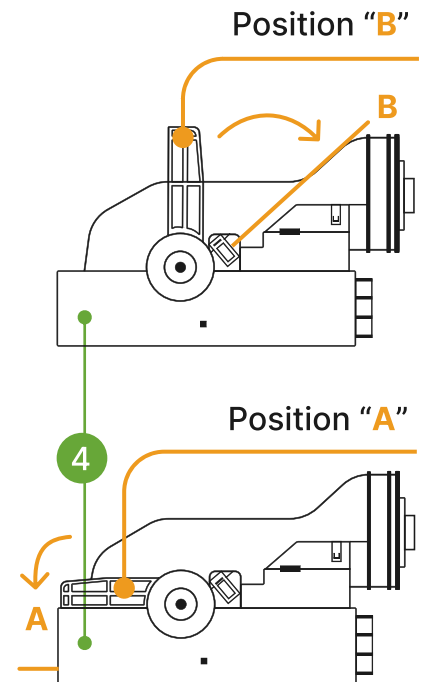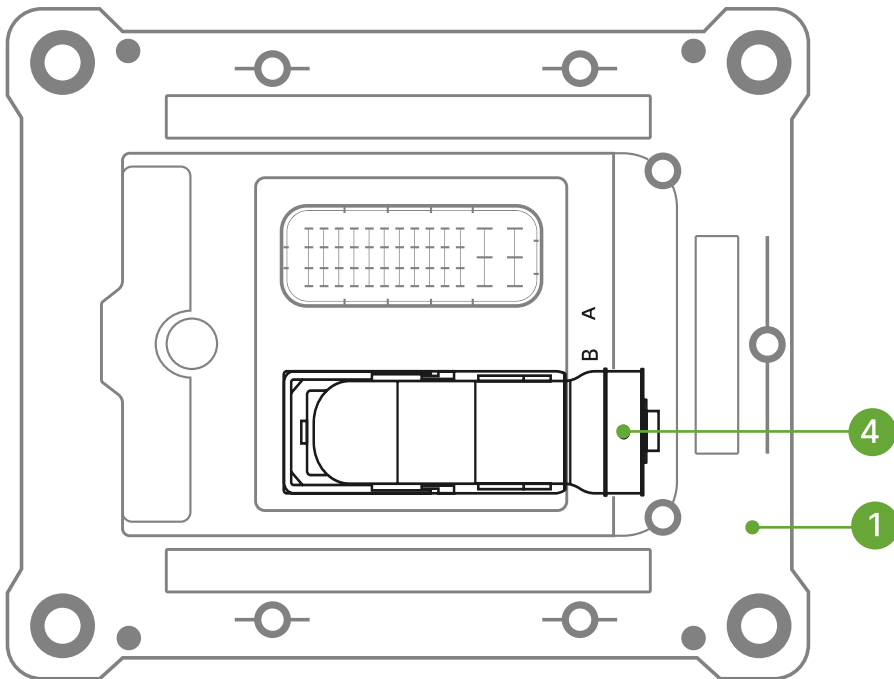


Connect the VLOMINGO ④ to the ECM ①.

- Move the lever to the position "B".
- Connect VLOMINGO to the "B" ECM socket ②.
- Move the lever to the position "A".

# Connection and Tuning:

## 2. Diag laptop, RP1210 adapter, and power connection to the ECM.

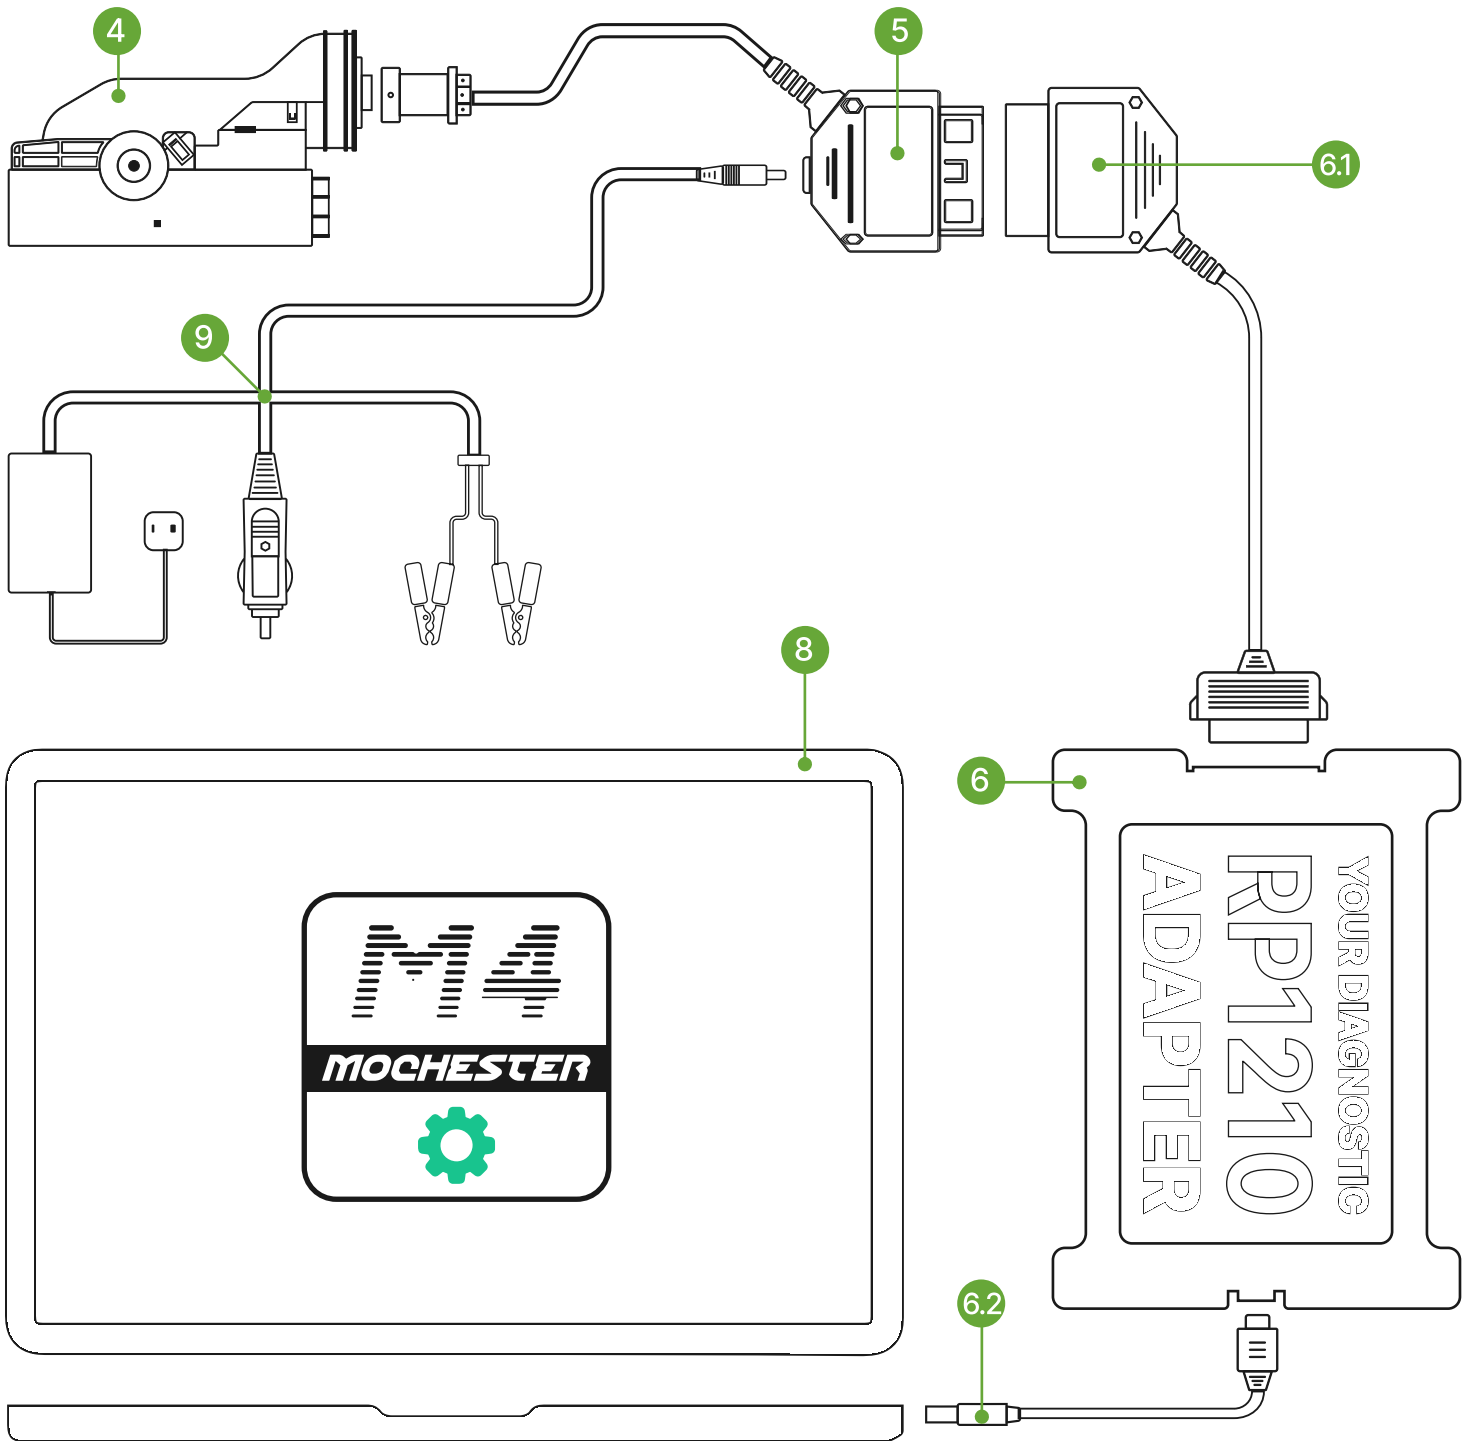


Perform all actions sequentially in the following order:

- Connect the VLOMINGO UNO Cable (5) to the VLOMINGO (4) and to the RP1210 adapter cable (6.1).
- Connect the adapter cable (6.2) to the adapter (6) and the diagnostic laptop (8).
- Choose the appropriate VLOMINGO power cable (9) and connect to the VLOMINGO UNO Cable (5).
- Launch Mochester Application on your diag laptop and follow the instructions.

# Wrong Ways to Connect the VLOMINGO:

1. Do not connect the VLOMINGO using the vehicle DC-to-AC adapter.

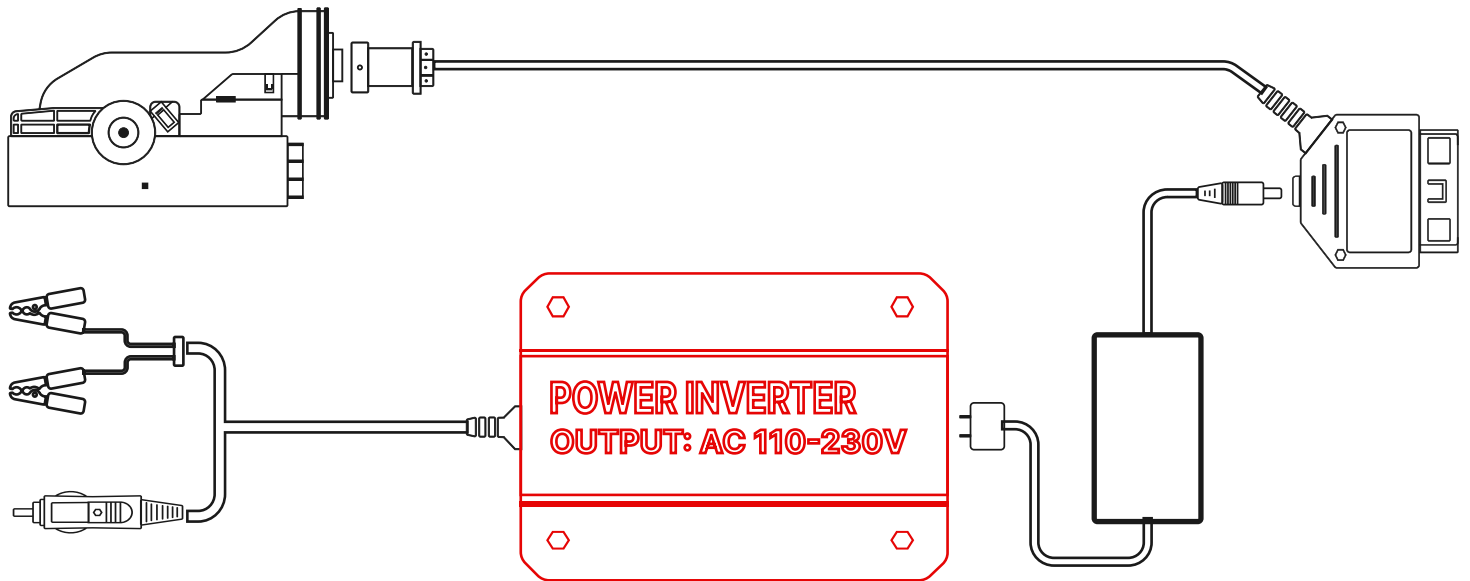

2. Do not connect the VLOMINGO using the same electricity network as the truck battery charging device is.

